Medium Flush NexGen-Hybrid™ Wood Burning Inserts

LopiStoves.com

Fireplacex.com

THIS MODEL QUALIFIES FOR THE 30% USA TAX CREDIT
ON THE PURCHASE, VENTING AND INSTALLATION COSTS
PLEASE CONSULT WITH YOUR TAX ADVISOR TO CONFIRM YOUR ELIGIBILITY FOR THIS TAX CREDIT

The Medium Wood Insert you are going to love

The Medium Flush NexGen-Hybrid™ Wood Insert is a great option for those looking to upgrade their old, inefficient fireplace. It features a sleek, flush design with a big, beautiful fire viewing area and concealed convection fans that increase the transfer and circulation of heat throughout your home.

NexGen-Hybrid™ Technology provides cleaner, longer burns, higher efficiencies and more heat into your home. This makes the Medium Flush NexGen-Hybrid™ Wood Insert one of the most efficient and cost effective ways to heat your home, even if the power goes out.

Learn More About NexGen-Hybrid™ Technology

Here are just a few benefits you'll love about the Medium Flush NexGen-Hybrid™ Insert:

- Cleaner burns and higher efficiencies mean less smoke and trips to the wood pile.
- Generous 2.2 cubic foot firebox holds logs up to 24 inches long, allowing for 10 hour burn times.
- Bypass damper helps to prevent smoke-backs during loading and reloading.
- Single operation air control gives you full range of control over the burn rate (low, medium, and high)
- Huge fire viewing area with beautiful arched and rectangular door designs.
- The optional GreenStart® Igniter makes starting your insert as easy as pushing a button!

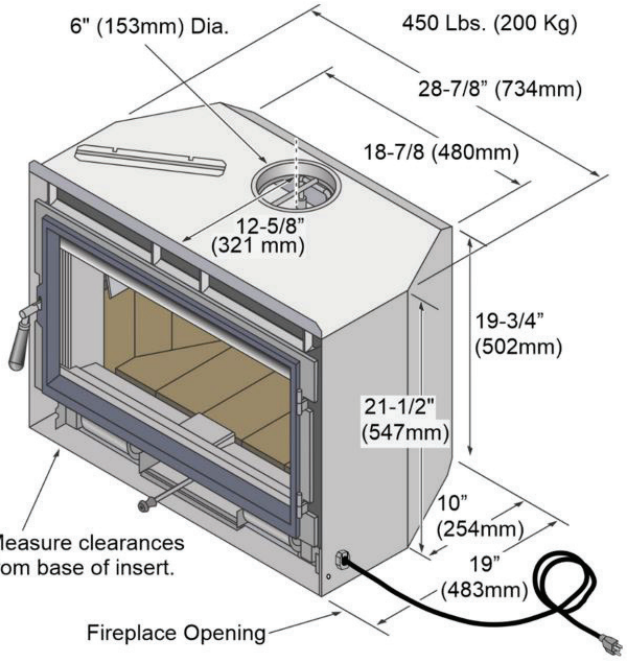

**GreenStart® Igniter option requires additional firebox width measured 3" from front of fireplace opening.*

SPECIFICATIONS

Heating Capacity*:	1,200 to 2,000 Square Feet
Cord Wood BTU's:	14,500 to 70,000 BTUs Per Hour
Crib Wood BTU's:	11,076 to 39,456 BTUs Per Hour
Emissions:	1.2 Grams/Hr. (Crib Wood)
HHV Overall Efficiency:**	Up to 77%
Maximum Burn Time:	Up to 10 Hours
Firebox Size:	2.2 Cubic Feet
Maximum Log Size:	24 Inches
Weight:	450 Pounds
Construction:	5/16" to 1/4" Steel Plate
Glass Viewing Area:	22-5/8"W x 10"H 216 Sq. In. Arched Door 227 Sq. In. Rectangular Door

** Heating capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area you live.*

***As tested using B-415.1 using Cord Wood. HHV = High Heat Value*

OPTIONS

- Insert Wiring Kit
- GREEN START™ Igniter. Light your fire with the push of a button!

RECTANGULAR DOOR FACE OPTIONS

Universal Face
Metallic Black paint finish
33-3/8 W x 23-1/4 H

Times Square™ Face
Metallic Black paint finish
35-3/4 W x 22-1/4 H

Metropolitan™ Face
Metallic Black paint finish
33-3/8" W x 23-1/4" H

Shadowbox™ Face
Metallic Black paint finish
35-3/4" W x 22-1/8" H

CLEARANCES TO UNPROTECTED COMBUSTIBLES

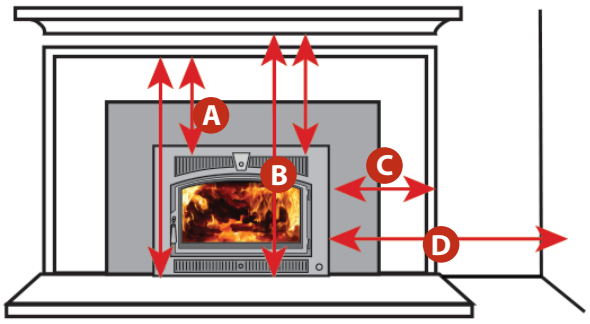

	Masonry	Metal (ZC)
A = Insert Base to Mantel	41-1/2"	41-1/2"
B = Insert Base to Top Facing	39"	39"
C = Firebox Side to Side Facing	9"	9"
D = Firebox Side to Side Wall	9"	9"

SIZING YOUR FIREPLACE FOR AN INSERT

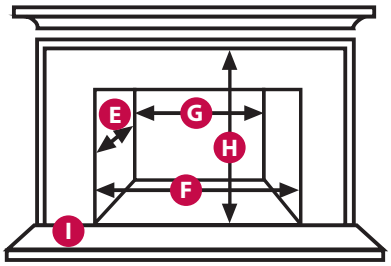

Your Fireplace Measurements

E = Depth _____
F = Front Width _____
G = Back Width _____
H = Height _____
I = Hearth Depth _____

Please use the provided chart above to mark down your fireplace dimensions. This will assist you in determining the right insert for your fireplace.
Approved ZC Fireplaces: See the Owner's Manual for details.

ARCHED DOOR FACE OPTIONS

Wilmington™ Face
Metallic Black paint finish
35-3/8 W x 23-1/4 H

Classic Arch™ Face
Metallic Black paint finish
33-1/4" W x 23-3/4" H

© 2023 T. I.