MONTEBELLO ST

DIRECT-VENT GAS FIREPLACES

STANDARD FEATURES

- Available in a 40" See Through model-configurable as indoor/indoor or indoor/outdoor applications
- Gas controls are conveniently hidden to the side of the fireplace opening for easy installation and finishing
- Electronic ignition with battery backup to provide continued operation in the event of a power outage
- Six flame settings with up to a 33% turn-down for precise heat control
- Smooth-faced design features ceramic glass for optimum heat transfer and a protective screen*
- Beautifully crafted aged oak high density fiber log set with heavy duty grate
- Interior liner selections consists of two-piece black reflective porcelain or ceramic fiber available in a variety of colors and patterns
- Full function remote control (T-stat, flame, IPI/CPI)
- Available in dedicated power-vent models (Natural Gas only)
- Optional outdoor window kit, tested and listed to ASTM commercial window standard for air infiltration, water resistance, structural integrity and thermal resistance (U-Value/CRF)
- Limited Lifetime Warranty

OUTDOOR KIT OPTIONS

(Choose One)

Light Tinted

Dark Tinted

INTERIOR LINERS

(Choose One)

Black Reflective Porcelain

Black Rustic

Architectural Stone

Buff Rustic Stacked

Buff Herringbone

Venetian Tile

FLAT WALL FRAMING SPECIFICATIONS

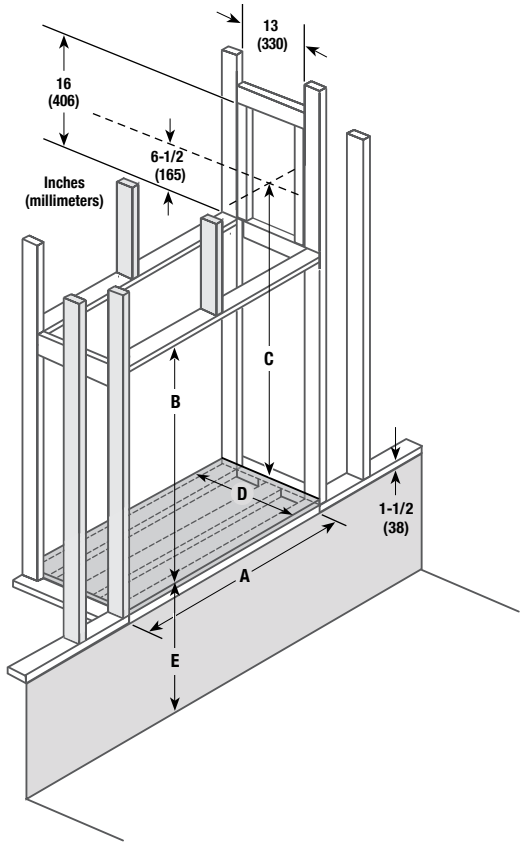

	MONTEBELLO ST	
A	*52-1/16"*	
B	*47-5/16"*	
C	*75-1/2"*	
D	*26-5/16"*	
E	*6"*	**(Pedestal for outdoor applications only)**

IMPORTANT NOTES:
As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

DIAGRAMS, ILLUSTRATIONS AND PHOTOGRAPHS ARE NOT TO SCALE—CONSULT INSTALLATION INSTRUCTIONS. PRODUCT DESIGNS, MATERIALS, DIMENSIONS, SPECIFICATIONS, COLORS AND PRICES ARE SUBJECT TO CHANGE OR DISCONTINUANCE WITHOUT NOTICE.

APPLIANCE SPECIFICATIONS

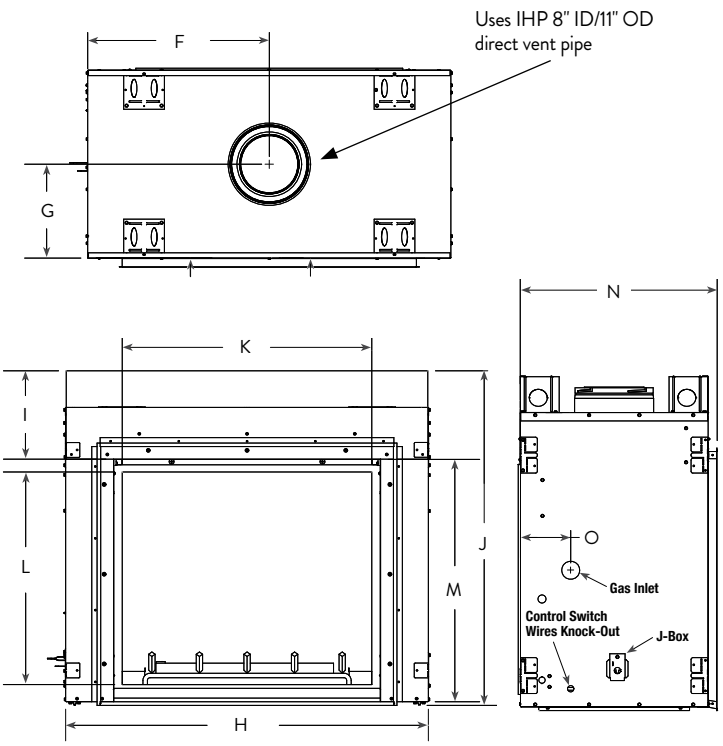

	MONTEBELLO ST
F	*25-9/32"*
G	*13-3/32"*
H	*50-1/2"*
I	*12-5/16"*
J	*46-19/32"*
K	*34-3/4"*
L	*29-19/32"*
M	*33-3/4"*
N	*27-7/16"*
O	*7"*

FIREPLACE EFFICIENCIES – Listed to ANSI Z21.88 as a gas fireplace heater.

MODEL	*FUEL*	*BTU/HR*	*AFUE***	*P4/ENERGUIDE**
MONTEBELLO	*NG*	*57,000-37,000*	*60.9%*	*59.9%*
MONTEBELLO	*LP*	*50,000-40,000*	*59.8%*	*55.1%*
MONTEBELLO STTYN	*NG*	*57,000-37,000*	*65.1%*	*61.6%*

*Intermittent ignition systems
**Annual Fuel Utilization Efficiency (AFUE) is the recognized U.S. rating system for the total efficiency of heating products.

astria FIREPLACES®

© 2021 Innovative Hearth Products

Visit us online
Astria.us.com

PFS C US Report #F14-107

NFI

Canada ENERGUIDE
Look for the **EnerGuide** Gas Fireplace Energy Efficiency Rating in the brochure
Based on CSA P.4.1-2015