Evergreen™ NexGen-Hybrid™ Wood Burning Stove

LopiStoves.com

THIS MODEL QUALIFIES FOR THE 30% USA TAX CREDIT
ON THE PURCHASE, VENTING AND INSTALLATION COSTS
PLEASE CONSULT WITH YOUR TAX ADVISOR TO CONFIRM YOUR ELIGIBILITY FOR THIS TAX CREDIT

NEW DESIGN, LOWER EMISSIONS, HIGHER EFFICIENCY

The newly designed mid-sized Evergreen NexGen-Hybrid™ Wood Stove hits the mark on performance, function and design. NexGen-Hybrid™ wood stoves are the cleanest burning, most efficient wood stoves available today!

These are not your typical catalytic wood stoves. NexGen-Hybrid™ is a combination of the two greatest wood burning technologies we've ever created: Our patented, award-winning Hybrid-Fyre® technology and our high performance NexGen-Fyre™ technology. This advanced system drafts and operates like a super clean non-catalytic stove, while burning less wood to generate a greater heat output like a catalytic stove. The results are lower emissions, higher efficiencies, and longer burn times.

Evergreen™ NexGen-Hybrid™ Stove

SPECIFICATIONS

Emissions:	1.2 Grams Per Hour	Glass Area:	183 sq. in (16-7/8"W x 10-7/8"T)
Heating Capacity*:	Up to 2,000 Square Feet	Firebox Size:	2.18 Cubic Feet
BTU Range Cord Wood:	12,500 to 70,500 BTUs Per Hour	Maximum Log Size:	20-1/2"
BTU Range Crib Wood:	10,768 to 37,113 BTUs Per Hour	Bypass Damper:	Yes
Maximum Burn Time:	Up to 14 Hours	Weight:	Legs: 505 lbs, Pedestal: 530 lbs
Efficiency**:	77.3% HHV (High Heat Value)	Construction:	3/16" to 1/2" Steel Plate

** Heating capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area you live.*
***As tested using B-415.1 using Crib Wood. HHV = High Heat Value*

OPTIONS

- 400 CFM Convection Fan
- Outside Air Kit
- GREENSTART™ Igniter

GREENSTART™ PUSH-BUTTON STARTUP. THE GREATEST WOOD STOVE OPTION EVER!

With a push of the GreenStart® button, super-heated air (1400˚F) starts your Evergreen NexGen-Hybrid™ in a New York minute. You can also use the GreenStart® Igniter when adding new wood or refreshing your fire after an overnight burn. Your fireplace door stays closed during startups; no more smoky starts, no more slow starts. Anyone can do it!

CLEARANCES & HEARTH PROTECTION

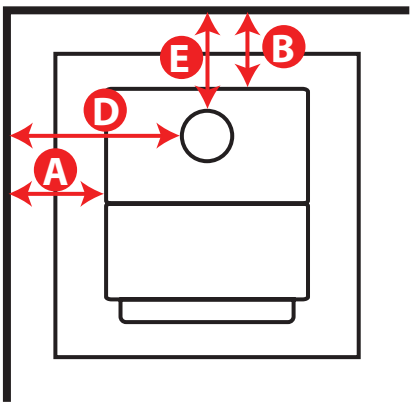

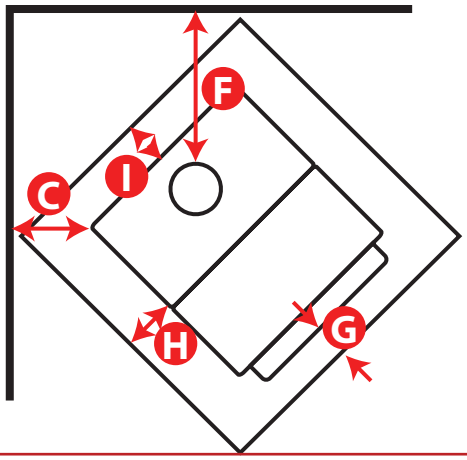

	Single Wall Connector	Double Wall Connector
A	12"	11"
B	19"	11"
C	11-5/8"	4"
D	22-1/2"	21"
E	21"	12-1/2"
F	21"	13-1/2"
G	16" USA, 18" CAN	16" USA, 18" CAN
H	6" USA, 8" CAN	6" USA, 8" CAN
I	6" USA, 8" CAN	6" USA, 8" CAN

© 2024 T. I.